


Type TCMW1B6 Convoluted Teflon® hose with vacuum wire and polypropylene braid – medium wall

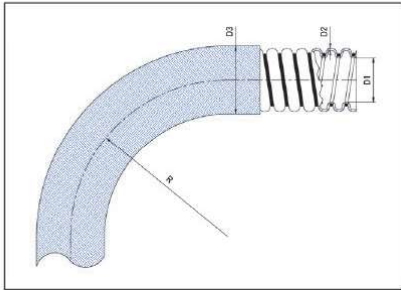

Construction:
A helically convoluted PTFE (polytetrafluorethylene) suction / pressure hose, medium wall, with external vacuum wire and polypropylene yarn braid.

Fittings:
Hose fittings with PTFE tail
Hose fittings with Hydraulic tail
Industrial fittings
Industrial fittings with PTFE lining


Typical Applications:
TCMW1B6 should be specified where vibrations or frequent handling are applied in combination with vacuum.

TEMP. -70°C +90°C

Size	D1		D2	D3		R	WP	BP	Vacuum	Lmax	Wt	Ref.	Ref.
	min.	max.	mm	min.	max.		mm	Bar20°C					
1/2"	11.6	13.6	0.82	21.4	23.4	50	10	40	887	10	210	TCMW1B6012	TCAMW1B6012
5/8"	15.1	16.4	0.88	26.3	28.2	65	10	40	887	10	400	TCMW1B6016	TCAMW1B6016
3/4"	19.5	20.5	1.00	31.1	33.9	55	10	40	887	10	490	TCMW1B6020	TCAMW1B6020
1"	24.5	25.5	1.10	36.7	40.7	85	10	40	887	10	810	TCMW1B6025	TCAMW1B6025
1 1/4"	31.5	32.5	1.15	44.4	48.6	100	10	40	887	10	1070	TCMW1B6032	TCAMW1B6032
1 1/2"	36.5	37.5	1.45	49.7	52.4	120	10	40	887	10	1310	TCMW1B6040	TCAMW1B6040
1 3/4"	44.5	45.5	1.45	58.3	63.9	135	10	40	887	10	1850	TCMW1B6045	TCAMW1B6045
2"	49.5	50.5	1.50	62.5	69.2	165	10	40	887	10	2050	TCMW1B6050	TCAMW1B6050
2 1/2"	62.5	63.5	1.60	83.4	91.6	230	7	28	887	10	3440	TCMW1B6065	TCAMW1B6065
3"	73.5	74.5	1.60	92.9	102.2	260	6	24	887	10	5710	TCMW1B6080	TCAMW1B6080



Type TCMW1B9 Convoluted Teflon® hose with vacuum wire and PVDF braid – medium wall

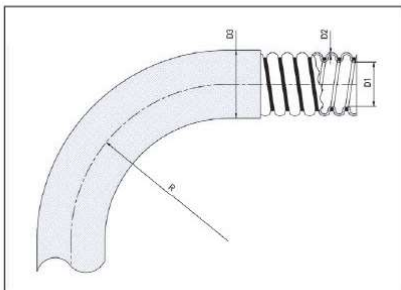


Construction:
A helically convoluted PTFE (polytetrafluorethylene) suction / pressure hose, medium wall, with external vacuum wire and PVDF yarn braid.

Fittings:
Hose fittings with PTFE tail
Hose fittings with Hydraulic tail
Industrial fittings
Industrial fittings with PTFE lining

Typical Applications:
TCMW1B9 should be specified where vibrations or frequent handling are applied in combination with vacuum.

TEMP. -70°C +150°C

Size	D1		D2	D3		R	WP	BP	Vacuum	Lmax	Wt	Ref.	Ref.
	min.	max.	mm	min.	max.		mm	Bar20°C					
1/2"	11.6	13.6	0.82	21.4	23.4	50	10	40	887	10	210	TCMW1B9012	TCAMW1B9012
5/8"	15.1	16.4	0.88	26.3	28.2	65	10	40	887	10	400	TCMW1B9016	TCAMW1B9016
3/4"	19.5	20.5	1.00	31.1	33.9	55	10	40	887	10	490	TCMW1B9020	TCAMW1B9020
1"	24.5	25.5	1.10	36.7	40.7	85	10	40	887	10	810	TCMW1B9025	TCAMW1B9025
1 1/4"	31.5	32.5	1.15	44.4	48.6	100	10	40	887	10	1070	TCMW1B9032	TCAMW1B9032
1 1/2"	36.5	37.5	1.45	49.7	52.4	120	10	40	887	10	1310	TCMW1B9040	TCAMW1B9040
1 3/4"	44.5	45.5	1.45	58.3	63.9	135	10	40	887	10	1850	TCMW1B9045	TCAMW1B9045
2"	49.5	50.5	1.50	62.5	69.2	165	10	40	887	10	2050	TCMW1B9050	TCAMW1B9050
2 1/2"	62.5	63.5	1.60	83.4	91.6	230	7	28	887	10	3440	TCMW1B9065	TCAMW1B9065
3"	73.5	74.5	1.60	92.9	102.2	260	6	24	887	10	5710	TCMW1B9080	TCAMW1B9080

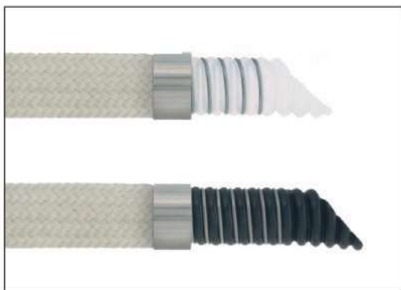

Teflon® is a registered trademark of Dupont.