




Stub-End Red Tee, LF

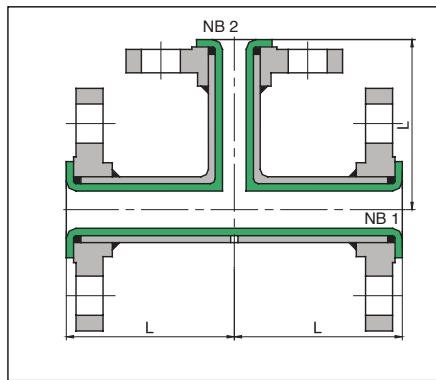

Red Tee, FF

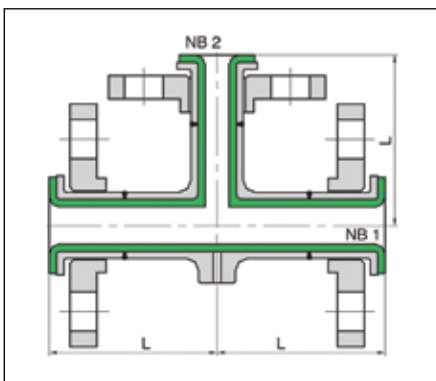

Steel Red Tee, LF

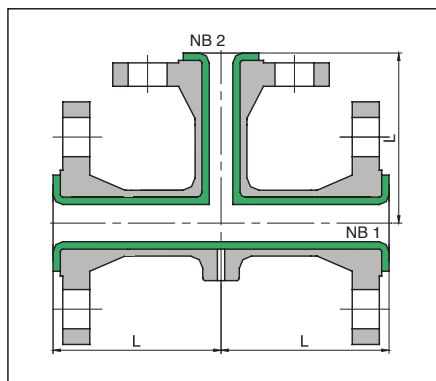

Cast Steel Red Tee, FF



NB1 #150	NB2 #150	L mm	Wt Kg
3/4"	1/2"	75	2.0
1"	1/2"	89	2.9
	3/4"	89	3.1
	1"	102	5.2
1 1/2"	1/2"	102	4.6
	3/4"	102	4.8
	1"	102	5.2
	1 1/2"	114	8.2
2"	1/2"	114	6.8
	3/4"	114	7.0
	1"	114	7.4
	1 1/2"	114	8.2
3"	1"	140	13.5
	1 1/2"	140	14.3
	2"	140	15.4
4"	1"	165	19.3
	1 1/2"	165	20.2
	2"	165	21.2
	3"	165	23.9

NB1 #150	NB2 #150	L mm	Wt Kg
6"	1"	203	30.8
	1 1/2"	203	31.7
	2"	203	32.8
	3"	203	35.6
	4"	203	37.9
8"	1"	229	50.7
	1 1/2"	229	51.6
	2"	229	52.7
	3"	229	55.5
	4"	229	57.8
10"	6"	229	61.7
	4"	279	78.8
	6"	279	83.0
12"	8"	279	90.6
	4"	305	104
	6"	305	108
	8"	305	115
	10"	305	122

STEEL	SIZE	MATERIAL	STANDARDS	NOTE
ELBOWS & TEES	1" - 12"	Cast Steel	ASTM A216 Grade WCB	Fixed Flgs
OTHER TEES	1" - 12"	Carbon Steel	ASTM A 106 Gr B / API 5L, B36.10	Fixed / Loose Flgs
	1" - 12"	Carbon Steel	ASTM A 106 Gr B / API 5L, A234 Gr WPB, B19.9	Fixed / Loose Flgs

Stainless steel / other material on request.